




**Aislante / Isolant / Insulation:** Poliuretano / Polyuréthane / Polyurethane

**Exterior / Extérieur / External:** Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

**Interior / Intérieure / Internal:** Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

**Espesor / Épaisseurs / Thickness(mm):**

	45	55	65
<b>K W/m<sup>2</sup>K:</b>	0,418	0,354	0,307
<b>K Kc/m<sup>2</sup>°C:</b>	0,359	0,304	0,264
<b>R m<sup>2</sup>K/W:</b>	2,391	2,826	3,261

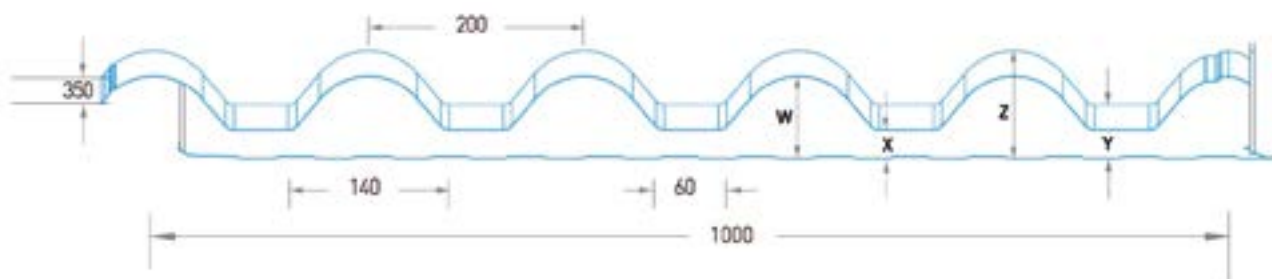

**PANELES  
CANARIOS**



**PANEL TEJA  
PIZARRA**



ESQUEMA ESTÁTICO - Distancia entre apoyos: cm.  
 SCHÉMA STATIC - Distance entre les supports: cm.  
 STATIC SCHEME - Distance between supports: cm.

Sobrecarga kg.							
Chapa exterior 0,5 mm / chapa interior 0,5 mm	561	358	265	207	176	127	107
Chapa exterior 0,5 mm / chapa interior 0,4 mm	543	339	244	187	154	106	88
P	539		180	180	138	108	
Is	440		237	176	121	95	
M			250	205	150	120	

Coeficiente de seguridad: 2,5  
 Coefficient de sécurité: 2.5  
 Security coefficient: 2.5