




**Aislante / Isolant / Insulation:** Poliuretano / Polyuréthane / Polyurethane

**Exterior / Extérieur / External:** Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

**Interior / Intérieure / Internal:** Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

**Espesor / Épaisseurs / Thickness(mm):**

	45	55	75
<b>K W/m<sup>2</sup>K:</b>	0,421	0,368	0,238
<b>K Kc/m<sup>2</sup>°C:</b>	0,405	0,319	0,205
<b>R m<sup>2</sup>K/W:</b>	2,120	2,720	4,200

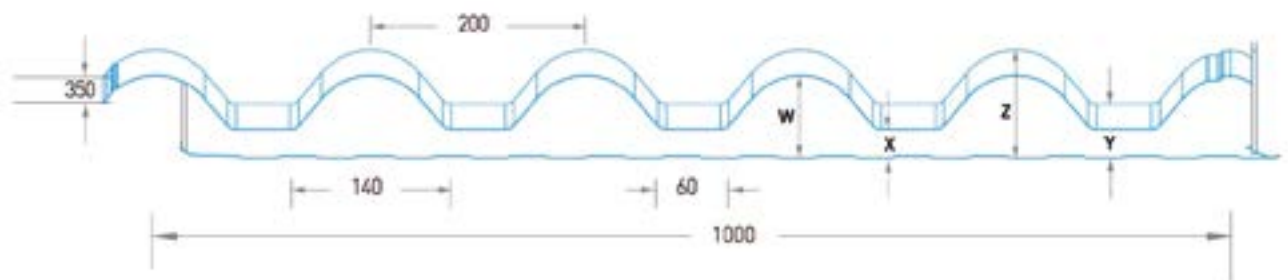

**PANELES  
CANARIOS**



# PANEL TEJA CANARIA



ESQUEMA ESTÁTICO - Distancia entre apoyos: cm.  
 SCHÉMA STATIC - Distance entre les supports: cm.  
 STATIC SCHEME - Distance between supports: cm.

Espesor panel (mm)	Espesor nominal apoyos(mm)	1750	2100
45	Chapa exterior 0,5 mm / chapa interior 0,5 mm		
	Chapa exterior 0,5 mm / chapa interior 0,4 mm	82	51
55	Chapa exterior 0,5 mm / chapa interior 0,5 mm	265	207
	Chapa exterior 0,5 mm / chapa interior 0,4 mm	244	187
75	Chapa exterior 0,5 mm / chapa interior 0,5 mm	280	230
	Chapa exterior 0,5 mm / chapa interior 0,4 mm	259	206

Coefficiente de seguridad: 2,5  
 Coefficient de sécurité: 2.5  
 Security coefficient: 2.5